



## Retail Tablet 3G

(\*)UID0350-XX1  
UID0350-XX0

S M L XL XXL

O i DISPLAY Retail Tablet S é um tablet baseado em Android, com uma tela multi-touchscreen de 7" que foi desenvolvido especificamente (embora não unicamente) para o mercado varejista, com tela multi-toque para aplicações interativas especiais e câmera de 3 megapixels embutida. Possui botões de controle e entradas de dispositivos estrategicamente posicionados na parte traseira, para prevenir que os consumidores modifiquem suas preferências de configuração. Você pode conectar seu Retail Tablet a dispositivos externos como uma impressora de cupons, um leitor de código de barras, e pode rodar uma série de aplicações Android, inclusive específicas criadas para interagir com seus consumidores. Pode utilizar o sistema Nucleo Media CMS para gerenciar seu conteúdo remotamente via Web. Possui diversas opções de suporte e fixações, além de furação VESA. Já vem com Wi-Fi e 3G(\*) embutidos. O i DISPLAY Retail Tablet S é a solução ideal para seu PDV, e foi criado para varejistas que procuram uma solução viável para Digital Signage interativo que caibam em qualquer lugar.

Disponível nas cores preta e branca



Tela sensível ao toque



Para varejo e marcas

### Nucleo Media CMS

Web Based CMS



Diversos suportes para fixação



Economia de energia

 3G


Já vem com Wi-Fi e 3G (\*)

Panel Information	
Screen Size	7"
Touch Screen Type	High quality capacitive touch screen
Active Area	154.08 (W) x 85.92 (H) mm
Pixel Pitch	0.0642 (H) x 0.1790 (V) mm
Max Resolution	800 x 480
Brightness	400 cd/m2
Contrast Ratio	500
Horizontal Viewing Angle	3 o'clock = 70° 9 o'clock = 70°
Vertical Viewing Angle	12 o'clock = 50° 6 o'clock = 70°
Aspect Ratio	16:9

Playback Functions	
Functionality	Supports auto play of movie/ flash swf file/ APK/ JPEG Support Standby mode Supports content management system Supports up to 20 extra push buttons
Video Formats	MKV/ MPEG4/ AVI/ FLV/ MOV/RMVB
Image Formats	JPEG, BMP, PNG

Audio Outputs	
Mono/ Stereo	Stereo
Audio Code	MP3/ APE/ FLAC/ AAC/ OGG

Recommended Video Format	
Resolution	1920X1080
Video Format	XVID (.AVI)
Frame Rate	23.976 fps
Bit Rate	4000 Kbps
Audio code	MP3 120Kbps

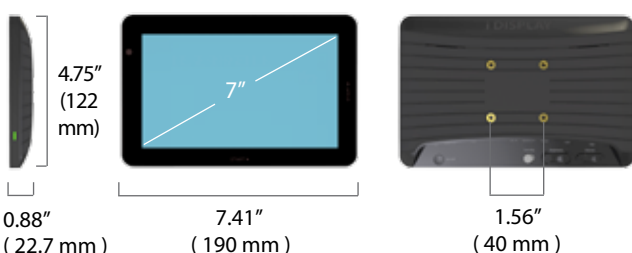

Power	
Power Input	110V/240V
Power Output	9V/2A , with Battery inside
Power Consumption	18W (max)
Power Source	Internal battery 1400mAH, external battery, Power supply cable 2m
Battery Charging Time	2 hours
Battery Lifetime (full brightness)	3 hours and 5 minutes
Operation Time in Stand By Mode	15 days with external 4 Cell R. Battery 21 days with D cell battery clip

General Information	
Size (W x H x D)	190 x 122 x 22.8 mm
Weight	420 g
Camera	3 Megapixels
Operation Temperature	0°C to 40° C
Relative Humidity	40% - 70%
Internal Memory	4GB
Connectivity (*)	Wi-Fi 802.11 b/g/n 3G WCDMA (CDMA 2000 optional) Bluetooth
Color	Black / White (other colors optional)
Input Ports	USB (*2) / Micro SD / 3G SIM / Micro HDMI / Earphones / I2C (PB and MS) / DC in/ On standby switch / Home button / Volume button / Brightness button
Approvals & Certifications	ROHS, CE / FCC

Packing	
Product Carton Size	300 x 150 x 50 mm
Master Carton Size	320 x 318 x 172 mm
Master Carton Weight	5 kg
Units Per Master Carton	5 pcs

Accessories	
Mounting	Mounting adaptor

Especificações podem mudar sem prévio aviso - Contacte [info@broadneeds.com.br](mailto:info@broadneeds.com.br)

**i DISPLAY**  
Interactive Digital Displays